



# SAM, DRYWALL ANCHOR


## Mounting in drywall

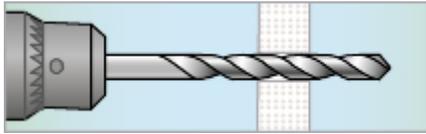


1. Drill the holes. Be careful not to damage the drywall on the back and around the exit hole.

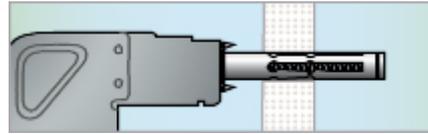

2. Push SAM drywall anchor through the hole.

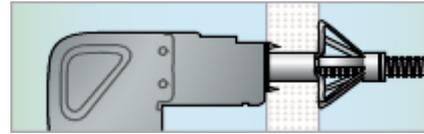

3. Expand using the pliers SAM. When there is resistance and the fixing feels stable the metal expander has reached the correct expansion.  
NOTE! If the screw needs to be screwed in for further expansion, it is important not to over expand the expansion part.

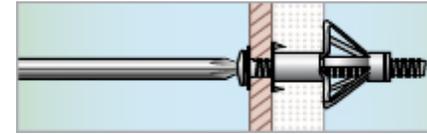

4. Unscrew the screw and secure the detail. The installation is finished.  
NOTE! If an impact wrench is used, it is important not to over-tighten the screw as this can affect the expansion part.