




Workplace Lighting

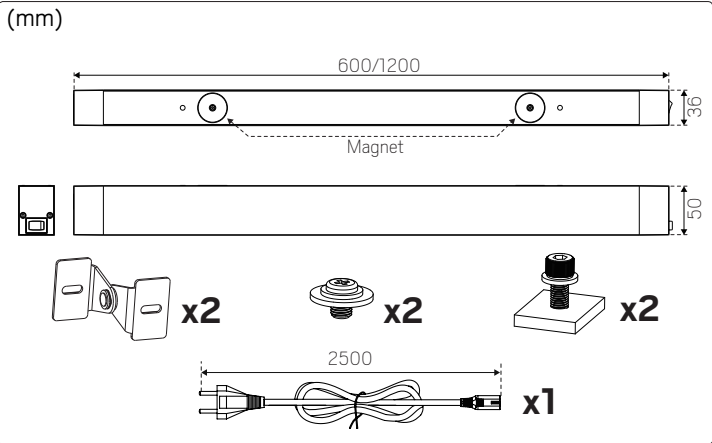

Accessories (Not included)

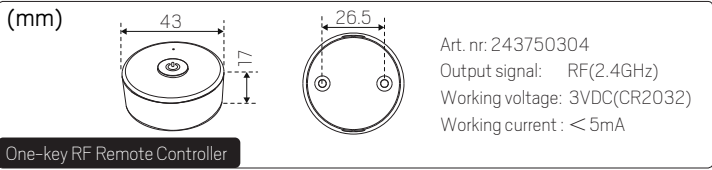



Art. nr	Name	Lumen	LED color	Total Effect
243750106	Workplace Lighting 600mm	3000 lm	4000K	25W
243750205	Workplace Lighting 1200mm	6000 lm	4000K	50W

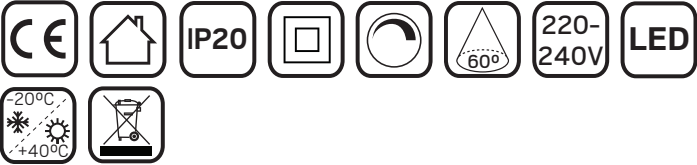


SAFETY INSTRUCTIONS

- en** Read these instructions carefully before commencing installation and retain for future reference. The luminaire should be installed by a licensed electrician and in accordance with local regulations. Make sure that the power is off before installation or maintenance.
- sv** Läs dessa instruktioner före installationen påbörjas och lämna den vidare till brukaren av anläggningen. Armaturen skall installeras av behörig installatör och enligt gällande föreskrifter. Se till att spänningen är frånslagen före installation eller underhåll.
- fi** Lue nämä ohjeet ennen asentamista ja luovuta ohjeet valaisimen seuraavalle käyttäjälle. Valaisimen saa asentaa valtuutettu asentaja voimassa olevien määräysten mukaisesti. Varmista, että jännite on kytketty päältä ennen asennusta ja huoltoa.
- no** Les disse instruksjonene før du starter installeringen, og gi den deretter videre til anleggets bruker. Armaturen skal installeres av en godkjent installatør og i henhold til gjeldende lover og regler. Sørg for at strømmen er koblet fra før installering og ved vedlikehold.


Installation-Magnet mounting

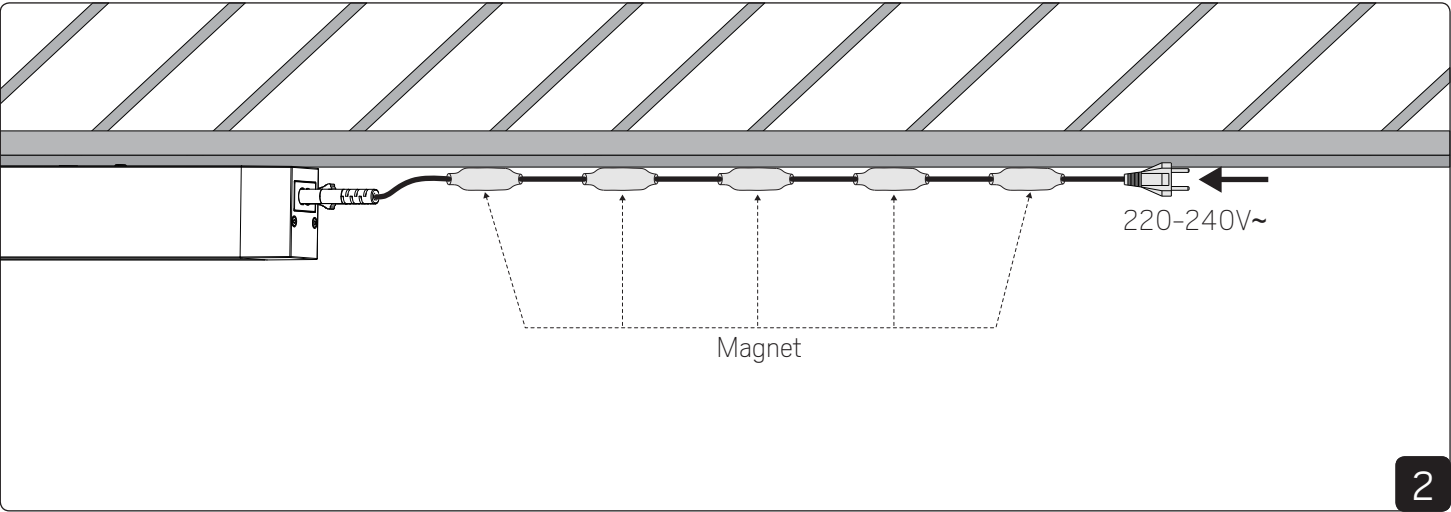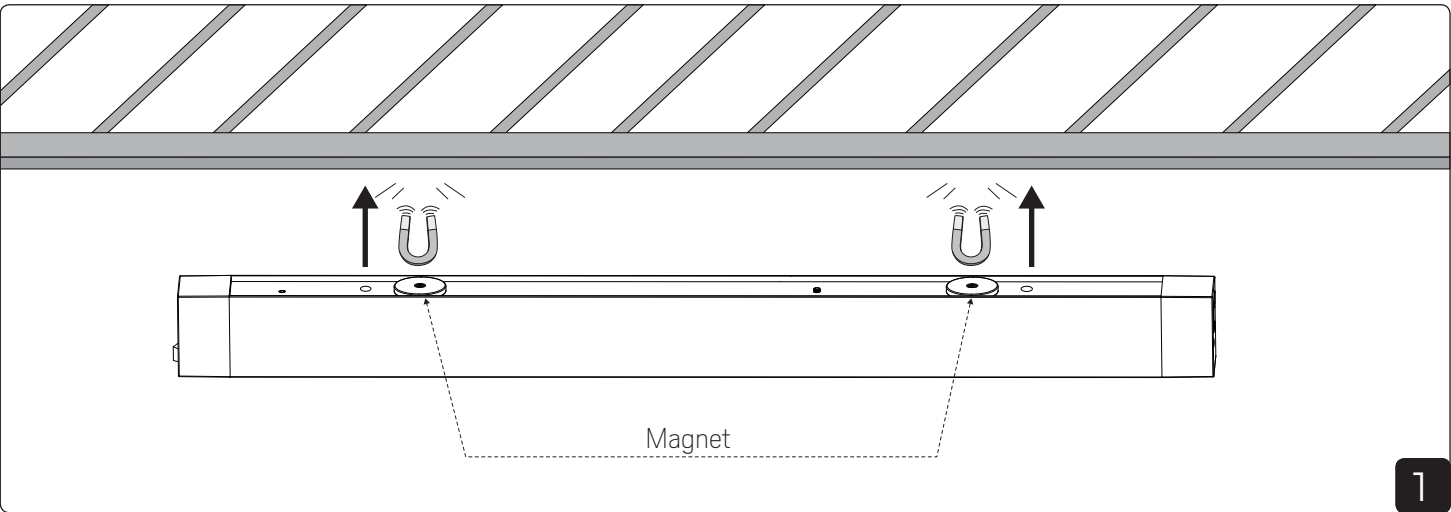


Installation-Bracket mounting

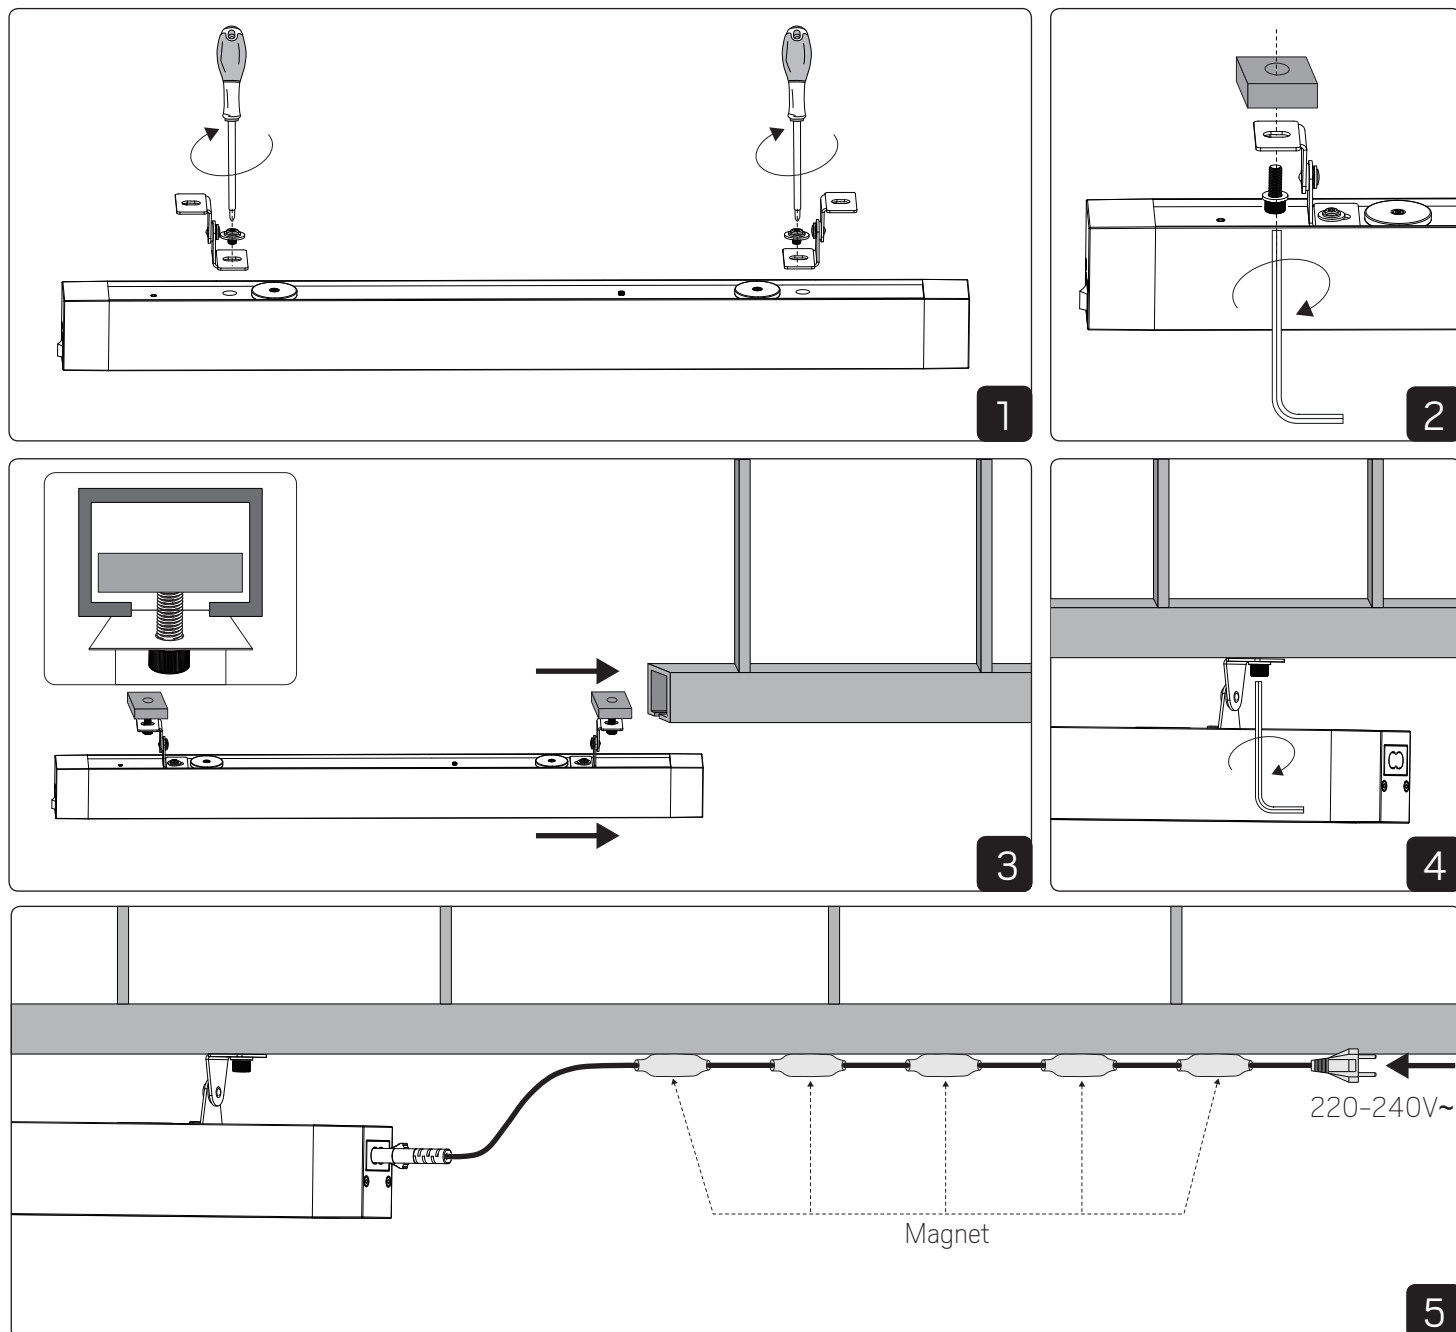


DIM & Remote Controller

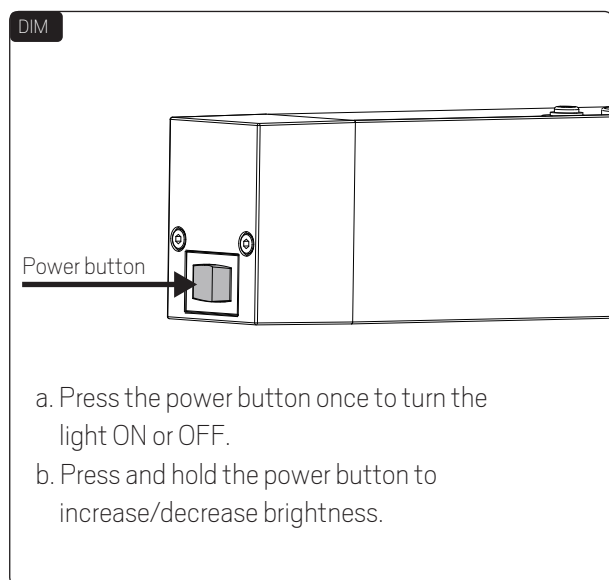

One-key RF Remote Controller



Click to turn ON/OFF button.
Press and hold 1-6s to increase/decrease brightness.
Wireless remote 10m distance.



Note: Before the first use, please remove the protective film on the battery.

Match Remote Control

Match: (Repeat this step for linking multiple lights)

Pull out the powercord.

Put the powercord in again. Repeat again.

Immediately short press on/off key 3 times on the remote.

The light blinks 3 times means match is successful.

Note: Suggested max pairing 10PCS lights.

Delete:

Pull out the powercord.

Put the powercord in again. Repeat again.

Immediately short press on/off key 5 times on the remote.

The light blinks 5 times means all matched remotes were deleted.