


Låsmuttrar (KM) enligt SS-ISO 2982

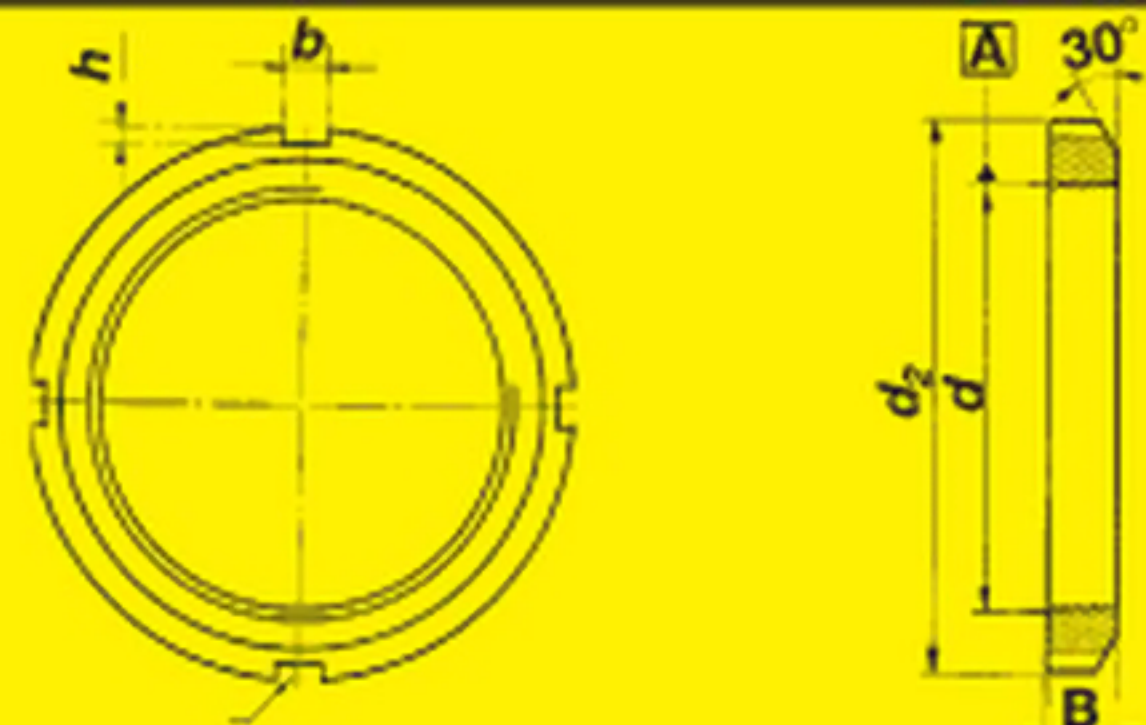

4-spår

d	5H	Gängor	d ₂	b ¹⁾	h	Storlek KM = Kullagemutter
10	M	10x0.75	18	3	2	KM 0
12		12x1	22	3	2	KM 1
15		15x1	25	4	2	KM 2
17	M	17x1	28	4	2	KM 3
20		20x1	32	4	2	KM 4
22		22x1	34	4	2	KM/22
25	M	25x1.5	38	5	2	KM 5
28		28x1.5	42	5	2	KM/28
30		30x1.5	45	5	2	KM 6
32	M	32x1.5	48	5	2	KM/32
35		35x1.5	52	5	2	KM 7
40		40x1.5	58	6	2.5	KM 8
45	M	45x1.5	65	6	2.5	KM 9
50		50x1.5	70	6	2.5	KM 10
55		55x2	75	7	3	KM 11
60	M	60x2	80	7	3	KM 12
65		65x2	85	7	3	KM 13
70		70x2	92	8	3.5	KM 14
75	M	75x2	98	8	3.5	KM 15
80		80x2	105	8	3.5	KM 16
85		85x2	110	8	3.5	KM 17
90	M	90x2	120	10	4	KM 18
95		95x2	125	10	4	KM 19
100		100x2	130	10	4	KM 20
105	M	105x2	140	12	5	KM 21
110		110x2	145	12	5	KM 22
115		115x2	150	12	5	KM 23
120	M	120x2	155	12	5	KM 24
125		125x2	160	12	5	KM 25
130		130x2	165	12	5	KM 26
135	M	135x2	175	14	6	KM 27
140		140x2	180	14	6	KM 28
145		145x2	190	14	6	KM 29
150	M	150x2	195	14	6	KM 30
155		155x3	200	16	7	KM 31
160		160x3	210	16	7	KM 32
165	M	165x3	210	16	7	KM 33
170		170x3	220	16	7	KM 34
180		180x3	230	18	8	KM 36
190	M	190x3	240	18	8	KM 38
200		200x3	250	18	8	KM 40